

Security Cable

(work) series

Part No: MC144-W



Description Stranded 21AWG PACW, 4 Cores, PVC Insulation, PVC Sheath.

Applicable Standards AS/CA S-008, BS4737-3.30, AS 1049

Suitable Applications For inter-connecting wiring, suitable for use in Security/Intruded Alarm system; Use in low voltage/low current applications such as intercommunication.

Not suitable for mains connection.

Images

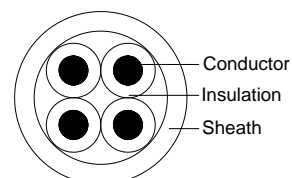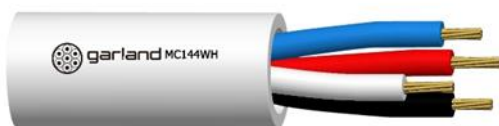

See supply information table for full details of jacket colour options.
Image for illustration purposes only.



Construction

Conductor	Material	PACW
	No. of Strands	14
	Strand Size	0.2 mm
Insulation	Cores	4
	Material	V-75 PVC
	Colour	White, Blue, Red, Black
	Nominal Thickness (mm)	0.35
	Nominal Diameter (mm)	1.5
Sheath	Material	V-75 PVC
	Colour	Refer to Packing Table
	Diameter (mm)	4.7
	Average Thickness (mm)	0.5

Garland's Work Series range is the experts' choice for high quality cables.

Security Cable

(work) series

Properties	Voltage Rating	ELV
	Operating Temperature Range	-15 to 7°C
	Max. Recommended Pulling Tension	120N
	Min. Bend Radius (install)	50 mm
	Approximate Mass	3.4kg/100 m

Supply Information	Part Number	Pack Size	Jacket Colour	Qty Per Carton/Reel	Cartons Per Pallet
	MC144WH100W	100m	White	6Reels	32 x 6 or 24 x 6
	MC144WH300BW	300m	White	-	45

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

Garland's Work Series range is the experts' choice for high quality cables.