



A Tyco International Company



IMPASSA

Self-Contained 2-Way Wireless Security System

Features That Make a Difference:

- Supports 64 wireless zones and 16 wireless keys (without using a zone slot)
- Integrated HSPA (3G) cellular communicator
- Cellular signal strength read-out to optimize placement
- 2-way wireless support
 - 1 keypad
 - 2 sirens
 - 16 wireless keys
- Real time clock update using cellular module
- Remote firmware upgrade via cellular
- Easy wireless device enrollment process
- Template programming
- Full 32-character programmable labels
- 5 programmable function keys
- Individual FAP keys
- 17 user access codes
- 500 event buffer
- Enlarged keypad buttons
- Outdoor temperature display

The IMPASSA Strategy: Detect. Defend. Defeat.

IMPASSA is the newest, next generation wireless security system from DSC. IMPASSA comes with the defense and offense needed to protect the 'king' – the home and homeowner - including:

- An integrated HSPA (3G) cellular communicator for high speed, reliable and secure alarm communications.
- The flexibility of a distributed approach that allows wireless devices to be located wherever needed for optimal protection.

As easy as setting up a chessboard, installers can now deliver a full-featured home security solution in minutes by easily enrolling a range of compatible wireless devices into the IMPASSA security system.

IMPASSA -- Checkmate.

Defensive Strategy - Integrated 3G Cellular Communicator

As any good chess player knows, looking many moves ahead is critical for a checkmate. As more homeowners transition away from traditional phone lines towards VoIP (Voice over IP) or mobile wireless phones for communication, IMPASSA

delivers an alternate communication path using the cellular network.

In addition, IMPASSA includes a more traditional phone line communicator using the Plain Old Telephone Systems (POTS).

The IMPASSA integrated communicator uses proven 3G technology. This not only allows for faster data-transmission speeds, but provides a longer lifecycle as cellular providers begin to phase out their GSM (2G) networks. Just like a mobile phone, IMPASSA displays the cellular signal strength to help determine the optimal mounting position within the home. For the homeowner's convenience, the real time clock updates the time and date via the cellular communicator.

The Flexibility of a Distributed Wireless System

Because IMPASSA is a distributed wireless system, installers have the flexibility of positioning the panel away from the premise's entry point. This allows for the installation of the



panels, keypads & modules

WT5500 2-way wireless wire-free keypad near the entry point so that even if the premise is compromised, the main unit (the IMPASSA panel) cannot be located by the intruder and tampered with.

For additional protection, install 2-way wireless sirens away from the IMPASSA alarm system to further camouflage and protect its location.

Compatibility

- WT5500 (P) 2-Way Wireless Wire-Free Keypad
- WT4901 2-Way Wireless Indoor Sirens or WT4911 2-Way Wireless Outdoor Sirens or a combination of both (up to 2 in total)
- WT4989 2-Way Wireless Key
- WS4920 1-Way Wireless Repeater
- All DSC 433 MHz Wireless Devices

Make your Moves Easily with IMPASSA

Once you have a good strategy in place, moving chess pieces should be quick and easy – and it is with the IMPASSA 2-Way Wireless Security System and wireless compatible devices. With only one wire needed for AC power, installers need to drill fewer holes and pull fewer wires, reducing on-site time, which leads to increased productivity and revenue. This benefits the homeowner too because it means minimal disruption to the home and less waiting around during the installation.

Using the IMPASSA 2-Way Wireless Security System also reduces the time spent enrolling compatible wireless devices. Installers confirm Electronic Serial Numbers (ESN), zone numbers and zone type through a series of user-friendly screens.

In addition, IMPASSA's template programming feature allows installers to quickly program basic functions by just entering a 4-digit code. Codes exist for pre-defined zone definitions, reporting code formats, communication call directions and DLS setup. Finally, the installer enters the monitoring station telephone number and account code, DLS access code, entry / exit delays and installer code.

Specifications

Dimensions	227mm (L) x 140mm (W) x 42mm (D) (8.93" x 5.51" x 1.65")
Current Draw.....	425 mA -750 mA
Power Supply.....	16.5 VAC/20 VA @ 50/60 Hz
Aux+ Output	12.0-12.5 VDC/100 mA
Battery Backup	24 hr Backup
Operating Environment	0° to 49° C (32° to 120° F)
Relative Humidity.....	5% to 93%
Zone Count.....	64
Access Codes.....	17





A Tyco International Company

Wireless Door/Window Contact WS4945



Features That Make a Difference:

- Replaces the WLS925L-433/
WLS935L-433
- Reliable 433 MHz technology
- Small, compact design; 30%
smaller than the WLS925L-433/
WLS935L-433
- 1 pre-installed lithium battery
with activation pull tab (included)
- 5/8" (16 mm) maximum magnet
gap
- Smooth-back plastics to apply
doubled-sided tape (included)
- Case and wall tamper (without
using any mechanical springs)
- PCB antenna
- PCB mounted on the cover for
easy installation
- Built-in reed switch
- Normally closed external contact
input
- UL/ULC listed for North America;
CE and RoHS compliant for
Europe

Regardless of the application, the compactly designed WS4945 wireless door/window contact should be every installer's first choice for tough-to-fit installations.

The contact has become the new DSC standard for door/window contacts due to its streamlined profile (30% smaller than its predecessor the WLS925L-433/WLS935L) and new design that allows for double-sided tape mounting. These features combine to help get you in and out of your jobs faster than ever before.

Quicker Installations

The WS4945 features a pre-installed battery that is activated by installers through a pull tab. This helps reduce installation

time as casings don't need to be opened for battery insertion. Simply draw the activation pull tab and mount the contact. To help further simplify the installation process, DSC has placed the PCB on the contact's cover. If you prefer to mount the contact using screws (recommended when using the wall tamper option), the new design does not require the removal of the PCB to do so.

Dependable & Versatile

The WS4945 is designed for dependable case- or wall-tamper detection. Depending on how the contact is purposed, it will send a signal to the alarm system if either its casing is opened or if it is forcibly removed from a wall. If the alarm system is armed when this occurs,

sensors and accessories

an alarm will be activated and the central station will be notified of the violation (if programmed to do so). The WS4945 also features an external contact input that allows a standard hardwired door to be connected to it. This is useful for installations where it is difficult to mount the magnet within the maximum allowable gap of the contact (5/8" [16 mm]).

Value Added

Significantly smaller than many door/window contacts, the WS4945 is housed within a compact casing that allows it to be used for the tightest-fitting installations. Once installed, the contact is inconspicuous and complements the décor of most homes. It is built with reliable 433 MHz technology, uses a long-life lithium battery and is compatible with all current DSC wireless receivers.

Ordering Information

WS4945	Wireless Door/Window Contact (NA Baud Rate)
WS4945BN	Wireless Door/Window Contact Brown Plastics (NA Baud Rate)
WS4945W	Wireless Door/Window Contact (EU Baud Rate)
WS4945BNW	Wireless Door/Window Contact Brown Plastics (EU Baud Rate)

Compatibility

- PowerSeries™ Wireless Receivers
RF5132-433/PC5132-433 all versions and RF5108-433
- MAXSYS® Wireless Receiver PC4164-433/RF4164
- PowerSeries RFK Keypads
(RFK5500/RFK5501/RFK5516/RFK5508)
- Fixed-Message LCD Keypad with Integrated Wireless Receiver RF5501-433
- SCW9045/9047 Self-Contained Wireless Security System
- IMPASSA Self-Contained Wireless Security System
- ALEXOR Distributed Wireless Security System

Specifications

Dimensions	2 ^{9/10} " × 1 ^{1/2} " × 0 ^{14/16} " (75 mm × 31 mm × 22 mm)
Battery	CR2 (3 V Lithium)
Battery Life	5-8 Years (Typical)
Operating Temperature	0 to 49 °C (32-120 °F)
Operating Humidity	5-93% RH



From Tyco Security Products

Wireless Passive Infrared Detector **WS4904**



Features That Make a Difference:

- Reliable 433 MHz technology
- WS4904P model version provides pet immunity up to 60 lbs (27 kg)
- Digital signal analysis for consistent detection throughout the coverage pattern
- Exceptional catch performance at elevated temperatures
- Patented Multi-Level Signal Processing (MLSP) for accurate detection of human IR energy over a broad range of temperatures
- High-traffic shutdown
- Temperature compensation
- 1 long-life lithium battery included; capable of up to 9 years of battery life
- Sensitivity adjustment to configure the detector for “normal” (high sensitivity) or “hostile” (low sensitivity) environments

Among the most technologically advanced detectors available, the WS4904 achieves superior detection and false alarm prevention through digital signal analysis. Digital information is more accurately analyzed using software and is not subject to signal degradation caused by amplification, noise, distortion or signal clipping. The detector's technology adapts to changing environmental conditions by adjusting critical detection parameters to provide improved consistency of detection over all temperature ranges. Pet owners looking to be protected from false alarms can choose the WS4904P model version, a detector that is immune from pets weighing up to 60 lbs (27 kg).

Accurate Detection

Patented Multi-Level Signal Processing (MLSP) provides for more accurate detection of human IR energy over a broad range of temperatures. It's able to maximize catch performance while providing protection against false alarm sources such as radio interference, air vents and insects.


Wireless Reliability

Built with reliable 433 MHz technology, the detector features the latest low-power RF technology to effectively extend battery life. The PCB antenna design provides for more consistent performance and better coverage and sensitivity.

sensors and accessories

Contact your DSC distributor
www.dsc.com | 1-888-888-7838

Coverage Pattern

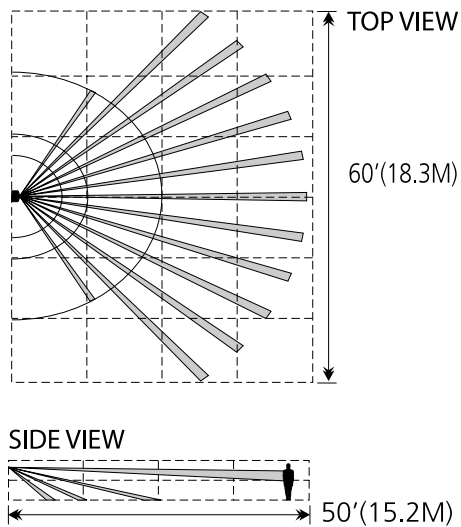

Compatibility

The WS4904 is compatible with the following receivers:

- IMPASSA Self-Contained 2-Way Wireless Security System
- ALEXOR 2-Way Wireless Security System
- SCW9045/9047 Self-Contained Wireless Security System
- PowerSeries Wireless Receivers PC5132-433 / RF5132-433 / RF5108-433 / TR5164-433
- PowerSeries RFK Keypads RFK55XX-433
- MAXSYS Wireless Receivers PC4164-433 / RF4164-433
- WS4920 Wireless Repeater

Specifications

Dimensions.....	4 1/4" x 2 1/2" x 2 2/16"
	(108 mm x 63.5 mm x 54 mm)
Battery	CR123A (3V Lithium)
Battery Life	9 Years (Typical)
Coverage.....	40 ft x 40 ft (12 m x 12 m)
	Fast Setting
Operating Temperature	-10° to 55°C (14° to 131°F)
Relative Humidity	5% to 93%