


POWER SOURCE Control Transformers

Series T –240V/24V AC Control Transformers

FEATURES

- Low Loss Iron core
- Separate Insulated Windings
- Fully Impregnated with Tropic Proof Anti Fungus Varnish
- Manufactured to AS/NZ3108-1994
- Slotted Holes for Fast Installation
- Quality Terminal Blocks
- 1 Year Warranty
- Optional DIN Rail Mounting Clip

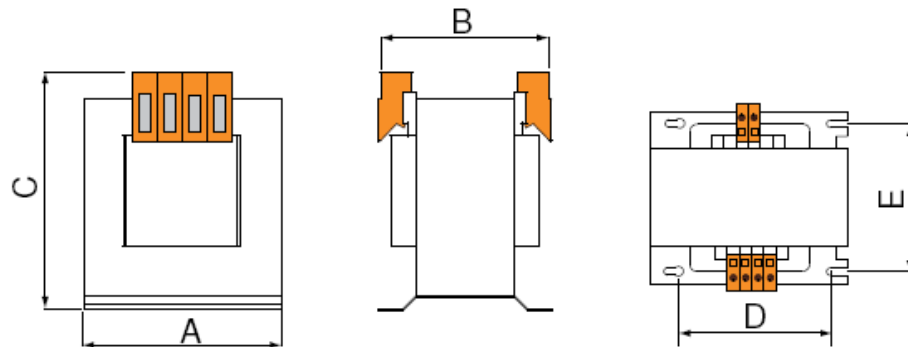

SPECIFICATIONS

Input Voltage	240V AC
Frequency	50/60Hz
Output Voltage	24V AC
Rating	20VA to 800VA
Insulation Class	H (155°C)
Temperature Rise	60°C

ORDERING INSTRUCTIONS

DIMENSIONS

Model	Rating	A	B	C	D	E	Weight
T20-240-24	20VA**	67mm	58mm	65mm	70mm	**	0.9 kg
T40-240-24	40VA	78mm	72mm	95mm	56mm	46mm	1.4 kg
T63-240-24	63VA	78mm	72mm	95mm	56mm	46mm	1.5 kg
T100-240-24	100VA	85mm	75mm	98mm	64mm	62mm	1.83 kg
T160-240-24	160VA	96mm	92mm	110mm	84mm	73.5mm	2.5 kg
T250-240-24	250VA	96mm	100mm	110mm	84mm	85mm	3.4 kg
T400-240-24	400VA	120mm	100mm	130mm	90mm	85mm	5.55 kg
T630-240-24	630VA	150mm	110mm	155mm	122mm	90mm	8.4 kg
T800-240-24	800VA	150mm	130mm	155mm	122mm	105mm	9.5 kg

** Saddle Mount Bracket

ADM INSTRUMENT ENGINEERING

21 GARDEN BOULEVARD
 DINGLEY VILLAGE, VICTORIA 3172
 PHONE: (03) 9551 6922, FAX: (03) 9551 6977
 Email: sales@admtech.com.au