

# 1085T-N

## Surface mount contact with screw terminals

### Easy Installation

---

Sentrol 1085T series is ideal for residential and commercial applications where terminal connections are preferred. The unit features positive clamping terminals with anti-rotation lugs and captured screws with combination heads. These features allow for easy, quick installations.

### Comprehensive Range

---

The range includes wide gap, SPDT and biased version for higher security. This makes it one of the most popular contacts available in the industry today.

### Durability and dependability


---

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

### High quality components and materials

---

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.

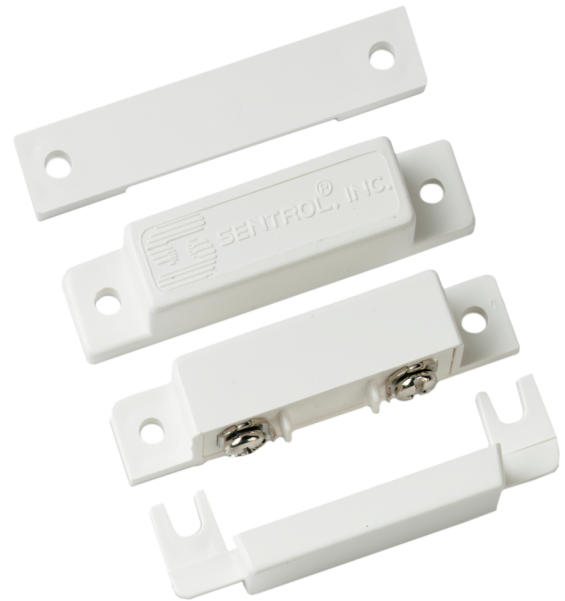

### Details

---

- Easy clamping terminal speed installation
- Cover, spacer included
- Ideal for residential and commercial
- Convenient surface mounting
- Versions with built-in 3K3 resistors available

# 1085T-N

## Surface mount contact with screw terminals

### Technical specifications

---

#### Gap distance (max)

---

19 mm

---

#### Connections

---

Screw terminals

---

#### Contact

---

NC

---

#### Supervised loop

---

No

---

#### Dimensions (L x W x H)

---

63 x 13 x 19 mm

---

#### Color

---

White

---



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 23 July 2021 - 10:31